



Operating Warnings

Adjust your flow settings carefully. Repeated false dead-end detection indicates that the Cal value should be increased (less sensitive).

For absolute safety always wire through the pump pressure switch. (The pressure switch can be bypassed if absolutely necessary - the unit will protect itself under normal conditions.)

This is a WATER PUMP controller: it will not work with air in the system. Always prime your system before starting work. If air in the system causes false dead-end detection, increase Cal value (less sensitive).

Do not set the Cal value too high. Setting it higher than necessary places extra strain on both the pump and the controller in a dead end situation. This can result in damage to both the pump and your controller.

Specification	Value
Supply Voltage	11 - 14 VDC
Maximum Current	10A
Typical Drive Current	4-5A
Voltmeter Accuracy	+/- 100mV
Enclosure Material	ABS
Water Resistance	IP65
Dimensions	115 x 65 x 40(mm)
Working Temperature	0 to 40 Deg C


* Your battery is at risk of permanent damage if you disable low battery cutoff and continue to use your controller for long periods when the battery voltage has fallen below +10.5V

DISCLAIMER
THE MANUFACTURER RESERVES THE RIGHT TO MAKE CHANGES TO ANY PRODUCT HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. THE MANUFACTURER DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN.

Step 1. Wiring

Connect the pump controller following this diagram.

NOTE only fit the fuse once all connections are made.

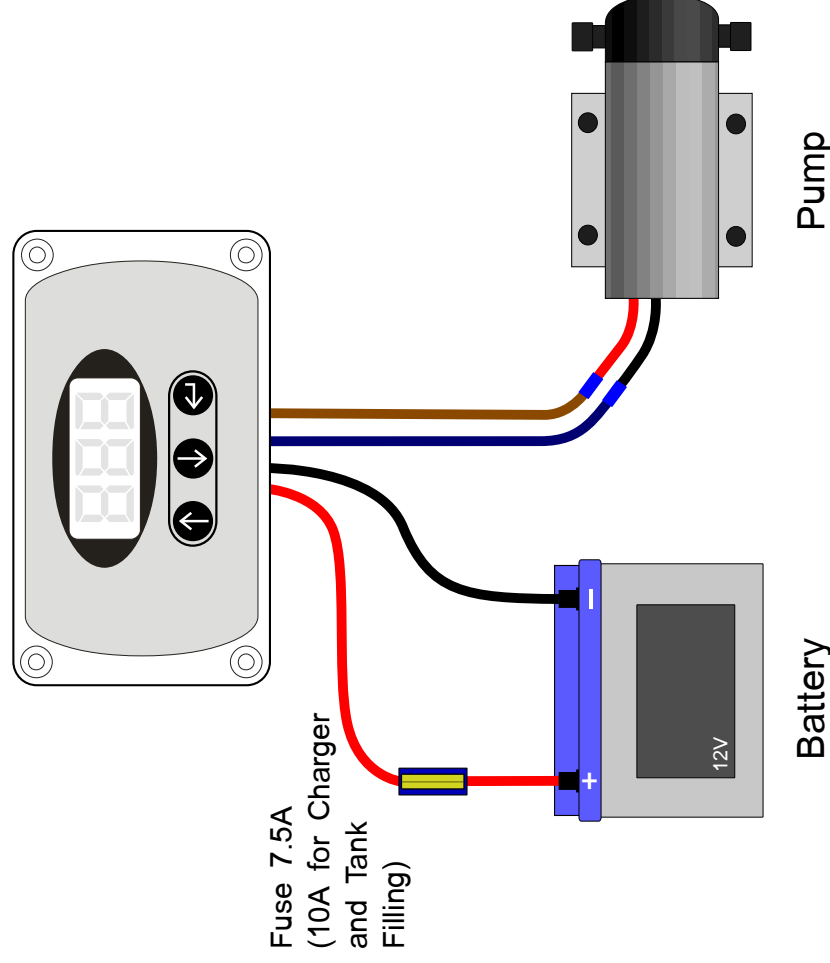

Make sure correct fuse is fitted inline. Failure to do so will result in damage to the unit.
Observe correct battery polarity. Failure to do so will result in damage to the unit.